



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : A61K 7/00, 7/46, 9/70, 9/50</p>	<p>A1</p>	<p>(11) International Publication Number: WO 98/57613 (43) International Publication Date: 23 December 1998 (23.12.98)</p>
<p>(21) International Application Number: PCT/EP98/00416 (22) International Filing Date: 26 January 1998 (26.01.98) (30) Priority Data: MI97A001430 18 June 1997 (18.06.97) IT (71) Applicant (for all designated States except US): BIOFARM S.R.L. [IT/IT]; Corso di Porta Vittoria, 28, I-20122 Milan (IT). (72) Inventors; and (75) Inventors/Applicants (for US only): PINNA, Fausto [IT/IT]; Via Silvio Pellico, 12, I-20050 Lesmo (IT). PINNA, Marco [IT/IT]; Via Verdi, 5, I-21056 Induno Olona (IT). (74) Agents: FRIGNOLI, Luigi et al.; Ing. A. Giambrocono & C. s.r.l., Via Rosolino Pilo, 19/B, I-20129 Milan (IT).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: ADHESIVE PLASTER WITH MICROCAPSULES CONTAINING ESSENCES, AND METHOD FOR ITS PREPARATION</p>		
<p>(57) Abstract</p> <p>Adhesive plaster that may be applied on human skin and that has a number of microcapsules applied on its surface destined to remain exposed to the air, the said microcapsules enclosing liquid essences that are released by the microcapsules when the latter burst as a result of friction, the said microcapsules being applied on the adhesive plaster by means of silk-screen printing and with the use of water-soluble resins.</p> <div data-bbox="690 1092 1388 1365"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ADHESIVE PLASTER WITH MICROCAPSULES CONTAINING
ESSENCES, AND METHOD FOR ITS PREPARATION

The subject of the present invention is an
5 adhesive plaster that may be applied on the skin
and that has its surface destined to remain
exposed to the air treated in such a way as to
release essences having an aromatic, balsamic,
deodorant, or similar effect, by the mere rubbing
10 of the said surface.

For many years now the technique of micro-
encapsulation, which enables the enclosing and
conservation of very small quantities of liquid
inside micro-capsules, has been well known and
15 widely used, the enclosed liquids being released
when the micro-capsules are caused to burst or to
dissolve, according to the nature of the material
that makes up the external wall of the micro-
capsules themselves.

20 The main aim of the present invention is to make
adhesive plasters on the surface of which (the
surface that is destined to remain exposed to the
air) are applied micro-capsules containing
essences that are released when the micro-capsules
25 themselves burst merely as a result of rubbing,
the said essences thus emanating in the air their
aroma, which may also have a balsamic, or
deodorant, or other effect.

Such an adhesive plaster may be kept exposed to
30 the air for a long time without losing its own
characteristics described above. The plaster may
be of any traditional shape; for example, it may
be made up of a thin strip of fabric which can be
applied underneath the armpits, in which case the
35 micro-capsules would automatically burst as a
consequence of the movement of the arms, thus
prolonging for a considerable time the effect of
release of aromatic, balsamic or deodorant

substances. Or else, the plasters may consist of the well-known nasal plasters, i.e., applicable on the nose and capable of keeping the nostrils dilated to favour breathing. In this case, the
5 bursting of the micro-capsules may be caused voluntarily by the person who wears the said plaster, for example in order to obtain the release of a balsamic essence.

The adhesive plaster according to the invention
10 comprises a flexible resistant substrate, on one surface of which is applied an adhesive that is capable of causing the said substrate to adhere to the skin of a person, the free surface of the adhesive being protected by a film of siliconized
15 paper or the like, and is characterized in that at least a part of the other surface of said substrate is coated with a number of micro-capsules that enclose a liquid essence or a mixture of liquid essences.

20 Preferably, the micro-capsules are anchored to the surface of the substrate by means of resins that are soluble in water (in particular acrylic and/or polyvinyllic resins). An aromatic essence is mixed to these resins so as to bestow on the plaster the
25 same scent that will be obtained when the micro-capsules burst. The micro-capsules have a diameter of between 80 and 800 micron (in particular, of between 100 and 140 micron). The quantity of the mixture of the micro-capsules and the resin that
30 fixes them to the substrate is between 10 g and 300 g (in particular, between 80 g and 150 g) per square metre of surface of substrate.

The adhesive plaster according to the invention is obtained with a method characterized in that
35 micro-capsules are prepared which enclose liquid essences. Then a mixture is prepared made up of from 10 wt% to 80 wt% of said micro-capsules, from 0 wt% to 40 wt% of at least one liquid

essence, and from 20 wt% to 90 wt% of a water-soluble resin, and characterized in that the said mixture is printed, by means of silk-screen printing, on at least part of a surface of a
5 resistant and flexible substrate, on the other surface of which has previously been applied a layer of adhesive capable of causing the said substrate to adhere to the skin of a person.

Preferably the said mixture comprises 25 wt% of
10 said micro-capsules, 33 wt% of said essence, 41 wt% of said resin, and 1 wt% of silica powder.

As essences that may be enclosed inside the micro-capsules, practically any essential oil may be used (either individually or mixed with other
15 essential oils), such as eucalyptol, Scots pine, mugo pine, menthol, mint, orange blossom, lavender, citronella, paciulli, sage, ylang ylang, etc.

Mixtures having an excellent aromatic effect of a
20 balsamic nature may, for example, be made up of two parts in weight of eucalyptol and one part in weight of Scots pine or mugo pine, or else of two parts of menthol and one part of mint.

It may be noted that, according to the known
25 techniques of micro-encapsulation, the micro-capsules - after they have been obtained - are separated from the liquid solution in which they have been obtained, then they are washed with water, and silica powder is added to them to help
30 them to dry out and to prevent the formation of lumps. The micro-capsules are then caused to pass through sieves which allow only the micro-capsules having the desired diameter to pass through, and finally they are dried out in an oven (for
35 example, at 28°C for eight hours) or at room temperature.

The dried micro-capsules thus obtained are then mixed with a liquid aromatic essence (or mixture

of essences), with the water-soluble resin, and possibly with the silica powder, and the mixture thus obtained is applied on the surface of a sheet (made of fabric or made of a thin sheet of synthetic material) destined to form the resistant substrate from which the desired plaster will then be punched out, after a film of adhesive (capable of securing the substrate to the skin of the user of the plaster) coated with a protective sheet of siliconized paper or the like has been applied on the other surface.

If the substrate is made of a sheet of synthetic material (for example, made of plastic polyester or soft PVC), the silk-screen printing of the above-mentioned mixture is preferably preceded by a silk-screen printing operation of a gripping agent (for example, a normal water-soluble acrylic resin in quantities such as to leave on the strip between 10 g and 40 g of the said gripping agent per square metre of the surface of the sheet) having the function of favouring anchorage of the micro-capsules to the sheet itself.

Obviously, the frame used for silk-screen printing of the mixture containing the micro-capsules will have meshes of size greater than the size of the micro-capsules themselves. The quantity of mixture that will be deposited on the surface of the substrate will depend on the size of the said mesh; for example, if the micro-capsules have a diameter of 120 micron and the mesh of the printing frame has dimensions of 270 micron, it will be possible to spread 120 g of mixture on each square metre of the substrate. If the mesh itself has dimensions of 120 micron, on each square metre of the surface of the sheet it will be possible to spread approximately 10 g of mixture; if, instead, the mesh has dimensions of 500 micron, on each metre of the surface of the

substrate up to 300 g of mixture containing the micro-capsules will be spread.

In order to make the characteristics of the invention easier to understand, a number of examples of embodiment of the invention will now be illustrated. These examples will have no limiting effect on the scope of the invention, and will be described with reference to the attached drawings, in which Figures 1 and 2 represent a cross section of two different plasters, shown in enlarged scale and out of proportion.

EXAMPLE 1

Assuming the aim is to prepare a plaster with deodorant aroma:

First of all an initial liquid mixture must be prepared consisting of the following essences:

Sage 10 wt% - Orange blossom 20 wt% - Paciuilli 20 wt% - ylang ylang 20 wt% - Lavender 30 wt%.

This liquid mixture is then micro-encapsulated inside small spheres having a diameter of 150 micron, which are subsequently washed and to which silica powder is added (10 g per kg of micro-capsules); the micro-capsules are then filtered and dried at room temperature for 12 hours, all these operations being according to the micro-encapsulation procedures known to prior art.

Then a second mixture is prepared containing 20 wt% of the above micro-capsules, 10 wt% of the pure essences mixed together as for the first liquid mixture, 69 wt% of water-soluble acrylic resin, and 1 wt% of silica powder.

As substrate of the plaster, polyester fabric 1 (Figure 1) is used, which is sufficiently soft and has a fine weft, and on one surface of which has been previously applied an adhesive layer 2 (for example, consisting of an acrylic adhesive) capable of causing the plaster to adhere to the skin, protected by a sheet 3 of siliconized paper.

The substrate thus prepared may have the shape of a sheet having, for example, dimensions of 70 x 100 cm.

These sheets are printed, on the surface opposite
5 the one on which the adhesive 2 has been applied, by means of the silk-screen technique, using the second mixture described above and employing a frame with a mesh of 300 micron. By means of this system, for each square metre of the sheet, 100 g
10 of the second mixture are spread to form a layer 4, which comes out of the machine for silk-screen printing already dry.

The sheets thus obtained are then dinked to obtain plasters of the desired dimensions, for example
15 6 x 3 cm, which can then be applied under the armpits of persons. It has been found that the involuntary movement of the arms causes an automatic rubbing of the free surface of the plaster; this tends to cause progressive bursting
20 of the micro-capsules, thus allowing the odoriferous essences to be released gradually.

It has been found that the plaster described above maintains its deodorant function in an optimal manner for approximately 8 hours.

25 It has likewise been found that, probably on account of the structure of the fine-meshed fabric used according to the example illustrated above, the mixture with the micro-capsules is anchored in an optimal way to the fine-weft fabric 1 without
30 presenting phenomena of detachment therefrom.

EXAMPLE 2

In a way similar to the one already described above, first of all an initial liquid mixture is prepared consisting of 65 wt% of eucalyptol and
35 35 wt% of Scots pine (or. alternatively mugo pine). The said mixture is micro-encapsulated in spheres having a diameter of 120 micron, which are then washed and to which is added silica powder

(10 g of silica per kg of micro-capsules). The micro-capsules are then dried in an oven at 28°C for 8 hours.

A second mixture is then prepared made up of
5 25 wt% of the above-mentioned micro-capsules,
33 wt% of pure essences mixed as indicated for the
first mixture, 41 wt% of a binding agent
consisting of a water-soluble polyvinyl resin, and
1 wt% of silica powder.

10 Separately, a sheet having a format of 70 x 100 cm
is prepared from a sheet 5 (Figure 2) of
transparent plastic polyester (or soft PVC), on
which has been applied a layer 6 of adhesive (for
example, acrylic resin suitable for adhering to
15 skin) protected by a sheet 7 of siliconized paper.
On the free surface of the sheet 5 there has first
been applied - by means of silk-screen printing -
a layer 8 of water-soluble acrylic resin (in the
quantity of 30 g per square metre of surface)
20 which has been made to dry in an oven at 30°C for
10 minutes. This resin has the function of a
gripping agent, in so far as the plastic polyester
(just like PVC, PET and polyurethane) does not
retain the mixture with the micro-capsules, which
25 would thus tend to become detached from the sheet
of polyester if the layer of gripping agent 8 were
not provided.

Subsequently, on the layer 8 is applied, by means
of silk-screen printing, a layer 9 of the second
30 mixture described above, using a frame with a mesh
of 270 micron which enables the depositing of 120
g of the said mixture over each square metre of
the substrate. The sheets which have thus
undergone silk-screen printing come out of the
35 silk-screen printing machine, which is provided
with an air-flow oven at approximately 30°C,
already dry.

The sheets thus obtained are dinked to form

plasters of approximately 6 x 2 cm, which may be applied over the nose or under the nostrils.

In this case, the micro-capsules present in the layer 9 are burst as a result of voluntary rubbing
5 of the external surface of the plaster, thus causing the odoriferous or balsamic substances enclosed therein to be released.

The nasal plasters may have any known profile or shape, and on them there may also be applied a bar
10 of rigid PVC or equivalent material, as described in the patent application PCT/EP96/05818.

CLAIMS

1. Adhesive plaster with microcapsules enclosing essences, comprising a flexible resistant substrate, on one surface of which is applied an adhesive capable of causing the said substrate to adhere to the skin of a person, the free surface of the adhesive being protected by a sheet of siliconized paper or the like, characterized in that at least one part of the other surface of the said substrate is coated with a number of microcapsules containing a liquid essence or a mixture of liquid essences.

2. Adhesive plaster according to Claim 1, characterized in that the said microcapsules are anchored to the surface of the said substrate by means of a water-soluble resin.

3. Adhesive plaster according to Claim 2, characterized in that the said resin is chosen from the group comprising acrylic resins and polyvinyl resins,

4. Adhesive plaster according to Claims 2 and 3, characterized in that the said water-soluble resin is mixed with at least one aromatic essence.

5. Adhesive plaster according to Claims from 1 to 4, characterized in that the said microcapsules have a diameter of between 10 and 800 micron.

6. Adhesive plaster according to Claim 5, characterized in that the said microcapsules have a diameter of between 100 and 140 micron.

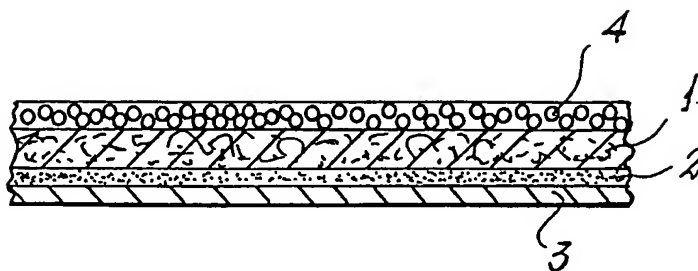
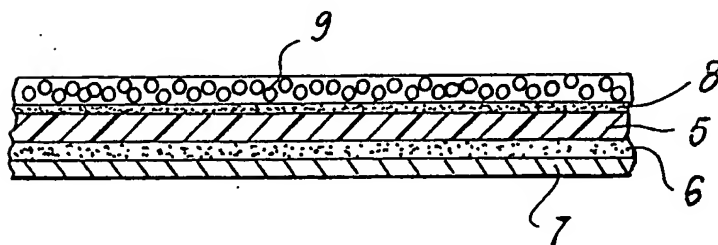
7. Adhesive plaster according to Claims from 1 to 6, characterized in that the said essence is chosen from the group comprising aromatic essences, balsamic essences, and deodorant essences.

8. Method for the preparation of adhesive plasters with microcapsules enclosing essences, characterized in that microcapsules are prepared that contain liquid essences, then a mixture is

prepared containing from 10 wt% to 80 wt% of the said microcapsules, from 0 wt% to 40 wt% of at least one liquid essence, and from 20 wt% to 90 wt% of a water-soluble resin, and that using the silk-screen printing technique the said mixture is printed on at least one part of one surface of a resistant and flexible substrate, on the other surface of which has been previously applied a layer of adhesive capable of causing the said substrate to adhere to the skin of a person.

9. Method according to Claim 8, characterized in that the said mixture contains from 0 wt% to 2 wt% of silica powder.

10. Method according to Claim 9, characterized in that the said mixture contains 25 wt% of said microcapsules, 33 wt% of said essence, 41 wt% of said resin, and 1 wt% of silica powder.

*Fig. 1**Fig. 2*

INTERNATIONAL SEARCH REPORT

Int. Appl. No.

PCT/EP 98/00416

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61K7/00 A61K7/46 A61K9/70 A61K9/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,Y	EP 0 195 254 A (JOHNSON & SON INC S C) 24 September 1986	1,5,7
Y	see the whole document	2-4,8-10
Y	US 4 654 256 A (DOREE RICHARD H ET AL) 31 March 1987	1-10
Y	WO 93 13938 A (VAUGHN LARRY F) 22 July 1993	1-10
Y	WO 95 26155 A (CESTENSA AG ;FRITZ GRUBER (DE)) 5 October 1995	1-10
A	EP 0 225 799 A (MINNESOTA MINING & MFG) 16 June 1987	

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

27 May 1998

Date of mailing of the international search report

15/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fischer, W

INTERNATIONAL SEARCH REPORT

Inter nal Application No

PCT/EP 98/00416

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 188 883 A (MINNESOTA MINING & MFG) 30 July 1986 -----	
A	US 4 959 208 A (CHAKRABARTI PARITOSH M ET AL) 25 September 1990 -----	

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter nal Application No

PCT/EP 98/00416

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0195254	A	24-09-1986	US 4582492 A	15-04-1986
US 4654256	A	31-03-1987	US 4898633 A	06-02-1990
			US 4774133 A	27-09-1988
WO 9313938	A	22-07-1993	AU 3474793 A	03-08-1993
WO 9526155	A	05-10-1995	DE 9405134 U	16-06-1994
			AU 2135995 A	17-10-1995
EP 0225799	A	16-06-1987	US 4879175 A	07-11-1989
			JP 62140641 A	24-06-1987
EP 0188883	A	30-07-1986	US 4661388 A	28-04-1987
			AU 573404 B	09-06-1988
			AU 5036185 A	31-07-1986
			BR 8506569 A	09-09-1986
			CA 1272641 A	14-08-1990
			JP 61169237 A	30-07-1986
			KR 9400621 B	26-01-1994
US 4959208	A	25-09-1990	US 4957787 A	18-09-1990
			US 5035886 A	30-07-1991
			US 5071645 A	10-12-1991